



Connecting globally



# Copper Cable Company Ltd.

is the UK subsidiary of TELE-FONIKA Kable S.A., with offices and a warehouse centrally located in Leicestershire.

We are a major supplier of housewiring, low voltage, power and fire resistant cables for use in domestic, commercial offices, public buildings and utilities. In addition, we provide bespoke flexible rubber cable solutions for critical temporary power, submersible pumps and trailing cable applications. For the telecommunications sector we supply copper and fibre data cables.

For your cable requirements we have stock available for immediate despatch from our East Midlands warehouse, for larger quantity shipments we can also deliver directly from our factories where substantial stocks are held.

## **Factory Approvals**

Our Flame-x 950 fire resisting cables are designed for life saving fire fighting and detection systems, so it is critically important these cables are designed and manufactured in internationally approved factories. You can trust TELE-FONIKA Kable, our factory management systems are approved to ISO9001 for Quality, to ISO14001 for Environmental and OHSAS18001 for Occupational Health & Safety

## **BASEC, LPCB Approvals**

For your safety and peace of mind, our Flame-x 950 fire resisting cables have been tested, verified and approved by the independent third party laboratories of BASEC and LPCB



# Table of Contents

3

---

4 TELE-FONIKA Kable Group

---

6 FLAME-X 950 SERIES 1

---

11 FLAME-X 950 SERIES 2

---

16 FLAME-X 950 SERIES 2e

---

20 FLAME-X 950 SERIES 3

---

25 FLAME-X 950 SERIES 4

---

30 FLAME-X 950 SERIES 6

---

# **Experience and competence of the TELE-FONIKA Kable Group**

---


**4**

The Group TELE-FONIKA Kable (TF Kable) is ranked in the forefront of the global cable industry.

The Group is the fourth manufacturer of cables and wires in Europe with significant development potential, based entirely on Polish capital.

TELE-FONIKA Kable Group's considerable investment in research and development centers and multi-skilled work teams, which have included eminent scientists working with our specialists, has been rewarded by the introduction of new-generation products and comprehensive services in the field of cable engineering. Products manufactured in our plants are sold in over 90 countries.

Our product assortment includes 25 thousand cable types. The highest quality of our products is confirmed by over 460 certificates for groups of wares licensed by 34 renown centres of certifications worldwide. The company combines the good traditions of the cable industry in Poland and innovative technical solutions. TELE-FONIKA Kable Group consists of six plants – four in Poland, one in Ukraine, and one in Serbia. We own over a dozen trade agencies abroad, reaching customers in several dozen countries around the world.

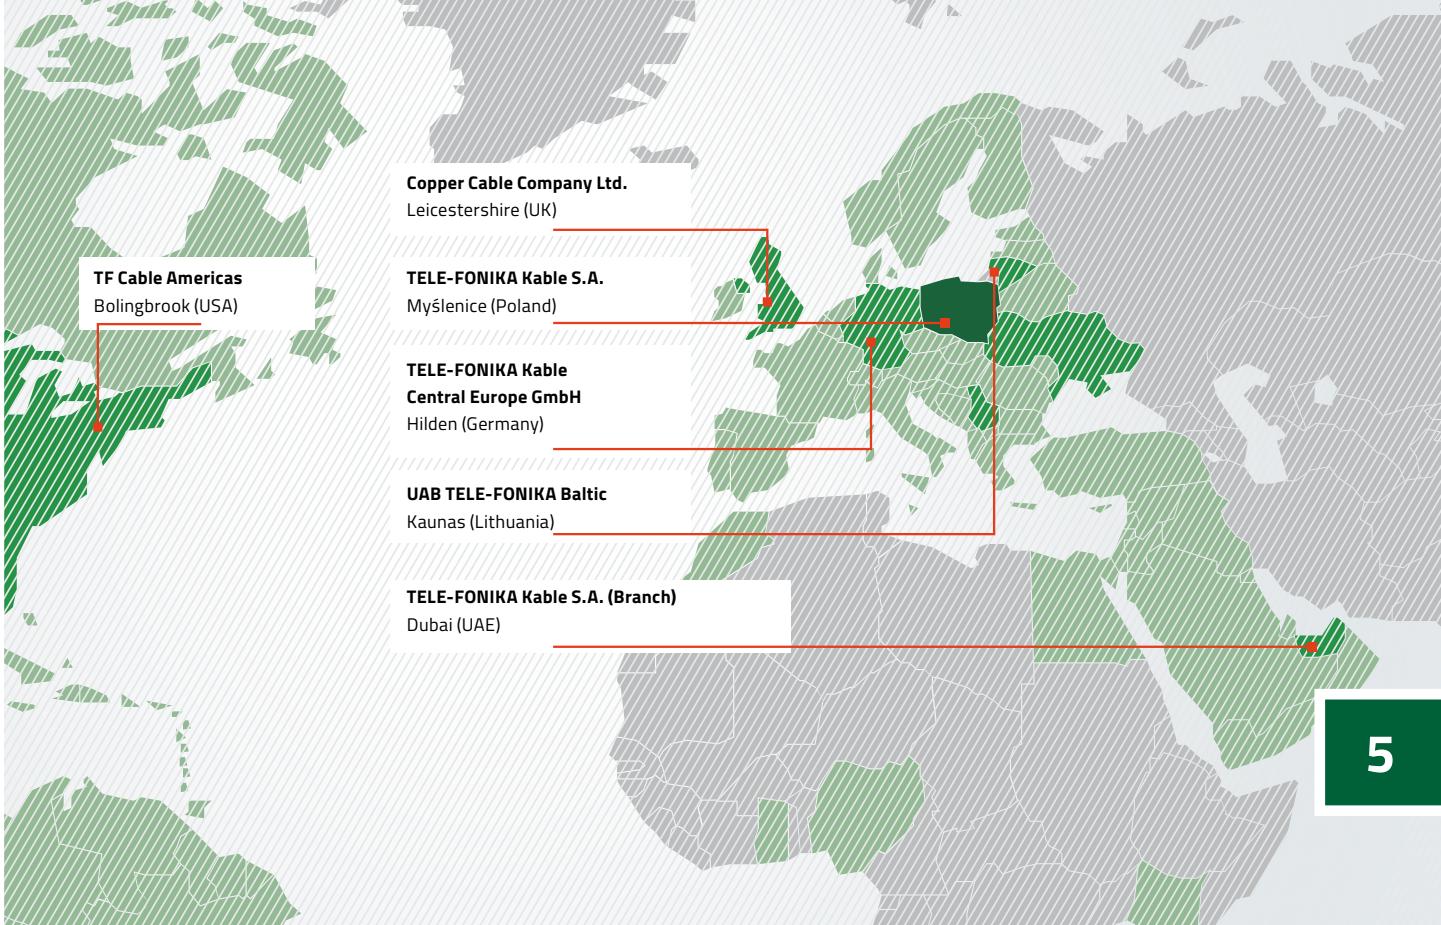

**Kraków-Wielicka plant** – it produces cables and wires with voltage ranging from 1kV to 30kV, including rubber insulation, used in the extractive industry and wind farms; halogen-free cables and conductors (installed inside buildings); and signaling and control cables for special applications

**Kraków-Bieżanów plant** – production of overhead lines from alloyed aluminum, silver plated copper conductors for railway traction networks, made on robotic technology lines

**Bydgoszcz plant** – the largest production center for medium, high and extra high voltage cables in Europe

**Myślenice plant** – production of copper and fiber optic telecommunication cables, computer cables and car cables

**Zajecar plant (Serbia)** – production of low and medium voltage cables, signaling and control cables, telecommunication cables, as well as halogen-free cables and wires

**Czernihov plant (Ukraine)** – production of non-flammable (N)HXH and N2XH cables, self-supporting AsXSn overhead cables, aluminum and copper wires up to 1kV, including assembly wires

#### **Bukowno-Poland plant (recycling of cable waste)**

– it has the recycling capacity of approx. 10 thousand tons of cable waste per year. This allows for the recovery of fractions from individual materials with purity of over 99.5%

**Fire Test Laboratory in the Krakow-Wielicka production plant** – it is equipped with apparatus that enables to conduct research ranging from basic tests of flame spreading on individual samples to flame spreading tests on bundles. Furthermore, it is equipped for testing density of emitted fumes and emission of corrosive gases

#### **Laboratory of High and Extreme Voltages in the production plant in Bydgoszcz**

– equipped with 4 Faraday cages (three for routine testing and one for cables and cable systems testing) along with a stroke generator and its own research field for qualification tests with 500kV testing systems and 5000A heating transformer sets



BS 6387, IEC 60331-21  
Cert No. 814c



# FLAME-X 950 SERIES 1

(FLAME-X 950 Single) **600/1000V**

Based on EN 50525-3-41 , BS 6387

Single core non-sheathed fire resistant cable having low emission of smoke and corrosive gases when affected by fire

6

## CONSTRUCTION

Conductors:	Circular or compacted circular, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
Primary insulation:	Fire resistant mica tape with a glass cloth
Insulation:	Special thermosetting LSOH compound of EI5 type acc. to BS EN 50363-5



## CHARACTERISTICS

Core identification:	Green/yellow, blue, black, brown, grey, red, yellow. Other colours are available on special request.
Maximum conductor operating temperature:	+90°C
Lowest installation temperature:	-5°C
Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	6 × D D – overall diameter of the cable

# FLAME-X 950 SERIES 1

## (Flame-X 950 Single) 600/1000V

### Fire performance

7

Fire resistance:	IEC 60331-21 BS 6387 <sup>1)</sup>	Circuit integrity - tested 90 min. at 950°C Category C – resistance to fire: 3 h at 950°C Category W – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category Z – resistance to fire with mechanical shock: 15 min at 950°C
Flame propagation:	BS EN 60332-1-2	
Smoke density:	BS EN 61034-2	
Corrosive and acid gases emission:	BS EN 60754-1 <sup>2)</sup> BS EN 60754-2 <sup>2)</sup>	HCl content < 0.5% pH ≥ 4.3 & conductivity ≤ 10 µSmm <sup>-1</sup>

<sup>1)</sup> Category C, W, Z for cables up to and including 95 mm<sup>2</sup>. Category C for cables above and including 120 mm<sup>2</sup>.

<sup>2)</sup> BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

### Applications

For use in fixed installations, where cable is protected by conduit or trunking.  
Fire resistant cables intended to provide circuit integrity in case of fire.

Standard length cable packing:	100 m in coils or on spools, or 500 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	--

### Approvals

LPCB	1,5 mm <sup>2</sup> to 500 mm <sup>2</sup> single-core
------	--

# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

## 8

### Technical and Electrical Characteristics

Nominal cross-sectional area of conductor <b>mm<sup>2</sup></b>	Radial thickness of insulation <b>mm</b>	Approximate overall diameter <b>mm</b>	Approximate net weight <b>kg/km</b>	Maximum resistance of conductor at temperature 20°C <b>Ω/km</b>
1.5	0.7	3.90	25.3	12.1
2.5	0.8	4.60	38	7.41
4	0.8	5.10	53	4.61
6	0.8	5.40	71	3.08
10	1.0	6.70	116	1.83
16	1.0	7.80	173	1.15
25	1.2	9.60	270	0.727
35	1.2	10.60	361	0.524
50	1.4	12.30	490	0.387
70	1.4	13.70	683	0.268
95	1.6	16.10	942	0.193
120	1.6	17.50	1171	0.153
150	1.8	19.50	1445	0.124
185	2.0	21.40	1800	0.0991
240	2.2	24.3	2338	0.0754
300	2.4	26.50	2918	0.0601
400	2.6	29.60	3766	0.0470
500	2.8	33.20	4810	0.0366

# FLAME-X 950 SERIES 1

(Flame-X 950 Single) **600/1000V**

## Current Ratings and Voltage Drop

Nominal cross-sectional area of conductor	Short circuit current ratings (1 sec)	Current Rating* Two cables, single phase A.C. or D.C.	Current Rating* Three or four cables, three phase A.C.	Voltage Drop** Two cables D.C.	Voltage Drop** Two cables, single phase A.C.	Voltage Drop** Three or four cables, three phase A.C.
mm <sup>2</sup>	Amps	Amps	Amps	mV/A/m	mV/A/m	mV/A/m
1.5	210	22	19	31	31	27
2.5	350	30	26	19	19	16
4	570	40	35	12	12	10
6	850	51	45	7.9	7.9	6.8
10	1400	71	63	4.7	4.7	4.0
16	2200	95	85	2.9	2.9	2.5
25	3600	126	111	1.85	1.90	1.65
35	5000	156	138	1.35	1.35	1.15
50	6800	189	168	0.99	1.05	0.90
70	9800	240	214	0.68	0.75	0.65
95	13600	290	259	0.49	0.58	0.50
120	17200	336	299	0.39	0.48	0.42
150	21100	375	328	0.32	0.43	0.37
185	26500	426	370	0.25	0.37	0.32
240	34900	500	433	0.190	0.33	0.29
300	43700	573	493	0.155	0.31	0.27
400	55900	683	584	0.120	0.29	0.25
500	70600	783	666	0.093	0.28	0.24

9

\* Installation reference method 3 (enclosed in conduit on a wall or in trunking etc.) as per BS 7671, Appendix 4, Conductor operating temperature 90°C, Ambient temperature 30°C

\*\* Installation reference methods 3 and 4 (enclosed in conduit, etc., in or on a wall) as per BS 7671, Appendix 4, Conductor operating temperature 90°C, Ambient temperature 30°C

# FLAME-X 950 SERIES 1

## (Flame-X 950 Single) 600/1000V

### 10

## Correction Factors for Ambient Temperature

Ambient Temperature, °C	25	30	35	40	45	50	55	60	65	70	75	80	85
Correction Factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41	0.29

## Correction Factors for Groups

Number of Circuits	2	3	4	5	6	7	8	9	10	12	14	16	18
Correction Factor	0.80	0.70	0.65	0.60	0.57	0.54	0.52	0.50	0.48	0.45	0.43	0.41	0.39



BS 7846  
Cert No. 814a, 814f

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

BS 7629-1, BS 6387, BS 5839-1

Fire resistant screened cables having low emission of smoke and corrosive gases when affected by fire

### CONSTRUCTION

11

Conductors:	Plain annealed copper solid class 1 (for 1 - 2.5 mm <sup>2</sup> ) and stranded class 2 (for 4 mm <sup>2</sup> ) acc. to BS EN 60228
Uninsulated circuit protective conductor:	Tinned annealed copper of the same nominal cross-sectional area and of the same class as the insulated conductors
Drain wire:	Tinned annealed copper wires class 2 acc. to BS EN 60228 (for cables with 7, 12, 19 – cores)
Insulation:	Special cross-linked heat resistant compound type EI2 acc. to BS EN 50363-1
Optional binder:	Non hygroscopic halogen free tape
Screen:	Aluminium/polyester laminated tape and uninsulated circuit protective conductor or drain wire
Outer sheath:	Thermoplastic zero halogen low smoke compound type LTS 3 acc. to BS 7655-6.1
Colour of sheath:	Red or white (other colours are permissible when agreed with the manufacturer)
Core identification:	2 core + ECC: brown, blue 3 core + ECC: brown, black, grey 4 core + ECC: blue, brown, black, grey 7, 12, 19 – core + Drain wire: numbering or for identification by colour: in each layer: brown (starting core), black (reference core)



### CHARACTERISTICS

Maximum conductor operating temperature:	+70°C
Minimum operating temperature (for fixed application) after installation without movement:	-40°C
Lowest installation temperature:	0°C
Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	6 × D; (D - overall cable diameter)

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

## 12

### Fire performance

Resistance to fire:	BS 6387 Category <b>C</b> – resistance to fire: 3 h at 950°C (IEC 60331) Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C
	BS EN 50200 Class PH30 (resistance to fire, with mechanical shock and with water: 30 min)
	BS 5839-1:2002 Clause 26.2d PH 30 Standard fire resistant cable
Flame propagation:	BS EN 60332-1-2 (IEC 60332-1-2) and BS EN 50266-2-2 (IEC 60332-3-22)
Smoke density:	BS EN 61034-2 (IEC 61034-2)
Gases evolved during combustion:	BS EN 50267-2-1 (IEC 61034-2): < 0.5% acid gas BS EN 50267-2-2 (IEC 60754-2): pH ≥ 4.3; conductivity ≤ 10 µSmm <sup>-1</sup>

### Applications

Installations emergency lighting and evacuation systems, fire and smoke detection systems, air-conditioning and alarm systems, automatic elevator doors, computer control rooms, offshore and marine emergency systems, emergency evacuation communicators.

Standard length cable packing:	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	---

### Approvals

LPCB	1 mm <sup>2</sup> to 4 mm <sup>2</sup> 2-core, 3-core, 4-core
------	---

# FLAME-X 950 SERIES 2

(Flame-X 950 Standard) 300/500V

## Technical and Electrical Characteristics

13

Number and cross-sectional area of conductor	Conductor class	Nominal cross-sectional area of protective conductor ECC	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at temperature 20°C	Maximum ECC conductor resistance at 20°C
n × mm <sup>2</sup>		mm <sup>2</sup>	mm	kg/km	Ω/km	Ω/km
2 × 1 RE + ECC	1	1	6.9	65	18.1	18.2
2 × 1.5 RE + ECC	1	1.5	7.8	86	12.1	12.2
2 × 1.5 RM + ECC*	2	1.5	8.2	91	12.1	12.2
2 × 2.5 RE + ECC	1	2.5	9.2	126	7.41	7.56
2 × 2.5 RM + ECC*	2	2.5	9.7	134	7.41	7.56
2 × 4 RM + ECC	2	4	10.9	187	4.61	4.70
2 × 6 RM + ECC*	2	6	12.0	251	3.08	3.11
3 × 1 RE + ECC**	1	1	7.3	81	18.1	18.2
3 × 1.5 RE + ECC	1	1.5	8.3	108	12.1	12.2
3 × 2.5 RE + ECC	1	2.5	9.7	160	7.41	7.56
3 × 4 RM + ECC	2	4	11.6	239	4.61	4.70
4 × 1 RE + ECC**	1	1	8.2	102	18.1	18.2
4 × 1.5 RE + ECC	1	1.5	9.5	138	12.1	12.2
4 × 1.5 RM + ECC*	1	1.5	10.2	147	12.1	12.2
4 × 2.5 RE + ECC	1	2.5	11.5	205	7.41	7.56
4 × 4 RM + ECC	2	4	14.6	310	4.61	4.70

\* based on norm. without certificate    \*\* without standards

# FLAME-X 950 SERIES 2

(Flame-X 950 Standard) 300/500V

14

## Technical and Electrical Characteristics

Number and cross- sectional area of conductor	Conductor class	Nominal cross-sectional area of drain wire	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at 20°C	Maximum drain wire resistance at 20°C
<b>n × mm<sup>2</sup></b>		<b>mm<sup>2</sup></b>	<b>mm</b>	<b>kg/km</b>	<b>Ω/km</b>	<b>Ω/km</b>
7 × 1 RE**	1	0.5	10.4	150	18.1	36.7
7 × 1.5 RE	1	0.5	12.0	207	12.1	36.7
7 × 2.5 RE	1	0.5	13.9	300	7.41	36.7
12 × 1 RE**	1	0.5	13.6	247	18.1	36.7
12 × 1.5 RE	1	0.5	15.5	333	12.1	36.7
12 × 2.5 RE	1	0.5	18.3	496	7.41	36.7
19 × 1 RE*	1	0.5	15.7	356	18.1	36.7
19 × 1.5 RE	1	0.5	18.1	496	12.1	36.7

\* based on norm. without certificate

\*\* without standards

## Current ratings and voltage drop

Ambient air temperature: 30°C. Conductor operating temperature: 70°C.  
Installation as specified in Appendix 4 of BS 7671 IEE Wiring Regulations

# FLAME-X 950 SERIES 2

## (Flame-X 950 Standard) 300/500V

### Reference Method 1

(clipped direct)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	15	44	13.5	38
1.5	19.5	29	17.5	25
2.5	27	18	24	15
4.0	36	11	32	9.5
6.0	46	7.3	41	6.4

### Reference Method 3

(enclosed in conduit on a wall or ceiling, or in trunking)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	13	44	11.5	38
1.5	16.5	29	15	25
2.5	23	18	20	15
4.0	30	11	27	9.5
6.0	38	7.3	34	6.4

\* with protective conductor

### Rating factors for ambient temperature

Ambient temperature, °C	25	30	35	40	45	50
Rating factor	1.03	1.00	0.94	0.87	0.79	0.71



BS 7846  
Cert No. 814b, 814g

# FLAME-X 950 SERIES 2e

(Flame-X 950 Enhanced) **300/500V**

BS 7629-1, BS 6387, BS 5839-1

"Enhanced" grade fire resistant electric cables having low emission of smoke and corrosive gases when affected by fire

## 16

## CONSTRUCTION

Conductors:	Plain annealed copper solid class 1 (for 1 - 2.5 mm <sup>2</sup> ) and stranded class 2 (for 4 mm <sup>2</sup> ) acc. to BS EN 60228 and special request
Primary insulation:	Fire resistant mica tape with a glass cloth
Insulation:	Special cross-linked heat resistant compound type EI2 acc. to BS EN 50363-1
Screen:	Helically applied aluminium / polyester tape and uninsulated circuit protective conductor
Uninsulated circuit protective conductor:	Tinned annealed copper conductor of the same nominal cross-sectional area and of the same class as the insulated conductors
Outer sheath:	Thermoplastic zero halogen low smoke compound type LTS 3 acc. to BS 7655-6.1
Colour of sheath:	Red or white. Other colours are available on special request.
Core identification:	2 core + ECC: brown, blue 3 core + ECC: brown, black, grey 4 core + ECC: blue, brown, black, grey



## CHARACTERISTICS

Maximum conductor operating temperature:	+70°C
Minimum operating temperature (for fixed application) after installation without movement:	-40°C
Lowest installation temperature:	0°C
Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	6 × D; (D - overall cable diameter)

# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

### Fire performance

17

<b>Resistance to fire:</b>	Complies with the PH 120 ENHANCED fire resistant cable described in Clause 26.2 of BS 5839-1  BS 6387 Category <b>C</b> – resistance to fire: 3 h at 950°C (IEC 60331) Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C
	EN 50200 - PH 120 BS 8434-2 - 120 min
<b>Flame propagation:</b>	BS EN 60332-1-2 (IEC 60332-1-2) and BS EN 50266-2-2 (IEC 60332-3-22)
<b>Smoke density:</b>	BS EN 61034-2 (IEC 61034-2)
<b>Gases evolved during combustion:</b>	BS EN 50267-2-1 (IEC 61034-2): < 0.5% acid gas BS EN 50267-2-2 (IEC 60754-2): pH³ 4.3; conductivity £ 10 mSmm⁻¹

### Applications

For use in installations emergency lighting and evacuation systems, fire and smoke detection systems, air-conditioning and alarm systems, automatic elevator doors, computer control rooms, emergency evacuation communicators. Recommended for systems, in particular building types, in which cables might need to operate correctly during a fire for periods in excess of those normally required for single phase evacuation of a building. Cables meeting the enhanced requirement should be used in buildings greater than 30 m in height, or with four or more evacuation zones, or for example hospitals, where there are progressive horizontal evacuation arrangements, or where a risk assessment identifies a possible need.

<b>Standard length cable packing</b>	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------------	---

### Approvals

<b>LPCB</b>	1 mm² to 4 mm² 2-core, 3-core, 4-core and 1 mm² to 2,5 mm² 7-core 1,5 mm² to 2,5 mm² 12-core and 1,5 mm² 19-core
-------------	---

# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

18

### Technical and Electrical Characteristics

Number and cross-sectional area of conductor	Conductor class	Nominal cross-sectional area of protective conductor ECC	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at 20°C	Maximum ECC conductor resistance at 20°C
n × mm <sup>2</sup>		mm <sup>2</sup>	mm	kg/km	Ω/km	Ω/km
2 × 1 RE + ECC	1	1	8.1	77	18.1	18.2
2 × 1.5 RE + ECC	1	1.5	9.0	99	12.1	12.2
2 × 1.5 RM + ECC*	2	1.5	9.4	104	12.1	12.2
2 × 2.5 RE + ECC	1	2.5	10.4	142	7.41	7.56
2 × 2.5 RM + ECC*	2	2.5	10.9	148	7.41	7.56
2 × 4 RM + ECC	2	4	12.1	202	4.61	4.70
3 × 1 RE + ECC**	1	1	8.6	96	18.1	18.2
3 × 1.5 RE + ECC	1	1.5	9.6	126	12.1	12.2
3 × 2.5 RE + ECC	1	2.5	11.0	180	7.41	7.56
3 × 4 RM + ECC	2	4	12.9	258	4.61	4.70
4 × 1 RE + ECC**	1	1	9.5	121	18.1	18.2
4 × 1.5 RE + ECC	1	1.5	10.8	159	12.1	12.2
4 × 2.5 RE + ECC	1	2.5	12.8	230	7.41	7.56
4 × 2.5 RM + ECC*	2	2.5	13.7	242	7.41	7.56
4 × 4 RM + ECC	2	4	15.9	333	4.61	4.70

\* based on norm, without certificate    \*\* without standards

### Current ratings and voltage drop

Ambient air temperature: 30°C. Conductor operating temperature: 70°C.  
Installation as specified in Appendix 4 of BS 7671 IEE Wiring Regulations

# FLAME-X 950 SERIES 2e

## (Flame-X 950 Enhanced) 300/500V

### Reference Method 1

(clipped direct)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	15	44	13.5	38
1.5	19.5	29	17.5	25
2.5	27	18	24	15
4.0	36	11	32	9.5

### Reference Method 3

(enclosed in conduit on a wall or ceiling, or in trunking)

Nominal area of conductor	1 two core cable* single phase A.C. or D.C.		1 three-core or 1 four-core cable*. three-phase A.C.	
	Current rating	Volts drop per ampere par metre	Current rating	Volts drop per ampere par metre
mm <sup>2</sup>	A	mV/m	A	mV/m
1.0	13	44	11.5	38
1.5	16.5	29	15	25
2.5	23	18	20	15
4.0	30	11	27	9.5

19

\* with protective conductor

### Rating factors for ambient temperature

Ambient temperature, °C	25	30	35	40	45	50
Rating factor	1.03	1.00	0.94	0.87	0.79	0.71

### Correction factors for groups

Number of cables in grouping	2	3	4	5	6	7	8	9	10
Rating factor	0.80	0.70	0.65	0.60	0.57	0.54	0.52	0.50	0.48

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



BS 6387, IEC 60331-21  
Cert No. 1354b, 1354d

MAX  
+90°C



# FLAME-X 950 SERIES 3

## 600/1000V

Based on BS 7846, BS 6387

Fire resistant security power cable having low emission of smoke and corrosive gases when affected by fire

20

## CONSTRUCTION

Conductors:	Circular, circular compacted or shaped, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
Primary insulation:	A suitable wrapping of mica tape with a glass cloth
Insulation:	Cable 1 to 16 mm <sup>2</sup> - special thermosetting low smoke zero halogen compound type EI5 acc. to BS 50363-5 Cable 25 to 1,000 mm <sup>2</sup> - cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
Bedding:	Special low smoke zero halogen filling compound (only 2, 3, 4 cores)
Outer sheath:	Thermoplastic LSOH compound of LTS1 type acc. to BS 7655-6.1



## CHARACTERISTICS

Nominal voltage:	0.6/1kV	
Colour of sheath:	Black. Other colours are available on special request.	
Core identification:	with green-yellow 1 core: green-yellow 2 core: - 3 core: green-yellow, blue, brown 4 core: green-yellow, brown, black, grey	without green-yellow black brown, blue brown, black, grey blue, brown, black, grey
Maximum conductor operating temperature:	+90°C	
Lowest installation temperature:	0°C	
Minimum operating temperature after installation without movement:	-40°C	
Maximum short-circuit conductor temperature:	+250°C	
Minimum bending radius:	6 × D for cables with circular copper conductors and 8 × D for cables with shaped copper conductors; D – overall diameter of the cable	

# FLAME-X 950 SERIES 3

## 600/1000V

### Fire performance

21

Fire resistance: (additional TF test)	BS 7846 p. 17.4.2 IEC 60331-21 BS 6387 <sup>1)</sup>	Category <b>F2</b> Circuit integrity - tested 90 min. at 950°C Category <b>C</b> – resistance to fire: 3 h at 950°C Category <b>W</b> – resistance to fire with water: 15 min at 650°C plus 15 min with water spray Category <b>Z</b> – resistance to fire with mechanical shock: 15 min at 950°C
Flame propagation:	BS EN 60332-1-2 BS EN 60332-3-24	
Smoke density:	BS EN 61034-2	
Corrosive and acid gases emission:	BS EN 60754-1 <sup>2)</sup> HCl content < 0.5% BS EN 60754-2 <sup>2)</sup> pH ≥ 4.3 & conductivity ≤ 10 µSmm <sup>-1</sup>	

1) Category C, W, Z for cables up to and including 500 mm<sup>2</sup>.

2) BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

### Applications

Fire resistant cables for use in fixed installations in industrial areas, public buildings (as for example power plants, hospitals, shopping centres, theatres) and similar applications where maintenance of power supply during a fire is required for a defined period of time.

Standard length cable packing

500 or 1,000 m on drums.

Other forms of packing and delivery are available on request.

### Approvals

LPCB

1 mm<sup>2</sup> to 1,000 mm<sup>2</sup> 1-core and 1 mm<sup>2</sup> to 16 mm<sup>2</sup> 2-core, 3-core, 4-core

# FLAME-X 950 SERIES 3

## 600/1000V

22

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating		Voltage Drop D.C.*	Voltage Drop single- phase A.C.*	Short circuit rating (1 sec)
							A.C. or D.C.*	Clipped direct			
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m	kA
1 × 1 RM	0.7	-	1.4	6.4	53	18.1	19	-	46	46	0.14
1 × 1.5 RM	0.7	-	1.4	6.7	61	12.1	25	-	31	31	0.21
1 × 2.5 RM	0.7	-	1.4	7.2	74	7.41	34	-	19	19	0.35
1 × 4 RM	0.7	-	1.4	7.7	93	4.61	46	-	12	12	0.57
1 × 6 RM	0.7	-	1.4	8	113	3.08	59	-	7.9	7.9	0.85
1 × 10 RM	0.7	-	1.5	9.1	162	1.83	81	-	4.7	4.7	1.4
1 × 16 RM	0.7	-	1.5	10.2	225	1.15	109	-	2.9	2.9	2.2
1 × 25 RM	0.9	-	1.6	12.2	325	0.727	143	135	1.85	1.85	3.5
1 × 35 RM	0.9	-	1.7	13.4	426	0.524	176	169	1.35	1.35	5
1 × 50 RM	0.9	-	1.8	15.1	563	0.387	228	207	0.99	1	7.1
1 × 70 RM	1.1	-	1.9	16.9	777	0.268	298	268	0.68	0.71	10
1 × 95 RM	1.1	-	2	19.1	1042	0.193	355	328	0.49	0.52	13.5
1 × 120 RM	1.2	-	2.1	20.9	1294	0.153	413	383	0.39	0.43	17.1
1 × 150 RM	1.4	-	2.2	23.1	1586	0.124	476	444	0.32	0.36	21.4
1 × 185 RM	1.6	-	2.4	25.4	1971	0.099	545	510	0.25	0.3	26.4
1 × 240 RM	1.7	-	2.6	28.3	2527	0.075	644	607	0.19	0.25	34.3
1 × 300 RM	1.8	-	2.6	30.5	3120	0.060	743	703	0.155	0.22	42.9
1 × 400 RM	2	-	2.8	34	4013	0.047	868	823	0.12	0.2	57.2
1 × 500 RM	2.2	-	3	38	5109	0.037	990	946	0.093	0.185	71.5
1 × 630 RM	2.4	-	3.2	43	6477	0.028	1130	1088	0.072	0.175	90.1
1 × 800 RM	2.6	-	3.4	48.1	8163	0.022	1288	1214	0.056	0.17	114.4
1 × 1000 RM	2.8	-	3.6	52	10100	0.018	1443	1349	0.045	0.165	134

# FLAME-X 950 SERIES 3

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating		Voltage Drop D.C.*	Voltage Drop single- phase A.C.*	Short circuit rating (1 sec)
							A.C. or D.C.*	Clipped direct			
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m	kA
2 × 1 RM	0.7	0.8	1.4	11.7	185	18.1	19	21	46	46	0.14
2 × 1.5 RM	0.7	0.8	1.4	12.2	208	12.1	24	26	31	31	0.21
2 × 2.5 RM	0.7	0.8	1.4	13.1	249	7.41	33	36	19	19	0.35
2 × 4 RM	0.7	0.8	1.4	14.1	304	4.61	45	49	12	12	0.57
2 × 6 RM	0.7	0.8	1.4	14.9	361	3.08	58	63	7-Sep	7.9	0.85
2 × 10 RM	0.7	0.8	1.5	16.9	497	1.83	80	86	4.7	4.7	1.4
2 × 16 RM	0.7	0.8	1.5	18.9	670	1.15	107	115	2.9	2.9	2.2
3 × 1 RM	0.7	0.8	1.4	12.2	203	18.1	17	18	-	40	0.14
3 × 1.5 RM	0.7	0.8	1.4	12.8	231	12.1	22	23	-	27	0.21
3 × 2.5 RM	0.7	0.8	1.4	13.8	281	7.41	30	32	-	16	0.35
3 × 4 RM	0.7	0.8	1.4	14.9	350	4.61	40	42	-	10	0.57
3 × 6 RM	0.7	0.8	1.4	15.7	423	3.08	52	54	-	6.8	0.85
3 × 10 RM	0.7	0.8	1.5	17.8	593	1.83	71	75	-	4	1.4
3 × 16 RM	0.7	0.8	1.6	20.2	826	1.15	96	100	-	2.5	2.2

# FLAME-X 950 SERIES 3

## 600/1000V

24

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of bedding	Nominal thickness of outer sheath	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating		Voltage Drop D.C.*	Voltage Drop single- phase A.C.*	Short circuit rating (1 sec)
							Clipped direct	Free Air			
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m	kA
4 × 1 RM	0.7	0.8	1.4	13.2	233	18.1	17	18	-	40	0.14
4 × 1.5 RM	0.7	0.8	1.4	13.9	268	12.1	22	23	-	27	0.21
4 × 2.5 RM	0.7	0.8	1.4	14.9	328	7.41	30	32	-	16	0.35
4 × 4 RM	0.7	0.8	1.4	16.2	414	4.61	40	42	-	10	0.57
4 × 6 RM	0.7	0.8	1.5	17.2	513	3.08	52	54	-	6.8	0.85
4 × 10 RM	0.7	0.8	1.5	19.4	718	1.83	71	76	-	4	1.4
4 × 16 RM	0.7	0.8	1.6	22.1	1010	1.15	96	100	-	2.5	2.2

\* current ratings acc. to BS 7671 table 4E1A, 4E1B, 4E2A, 4E2B

### Rating factors for air temperature

Ambient air temperature, °C	25	30	35	40	45	50	55	60
Rating factors	1.02	1.0	0.96	0.91	0.87	0.82	0.76	0.71

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.

MAX  
+90°C

UV

CE

✓  
RoHSBS 7846  
Cert No. 814d; 1354c

# FLAME-X 950 SERIES 4

## 600/1000V

BS 7846 - F2

Armoured fire resistant electric power and control cable having low emission of smoke and corrosive gases when affected by fire

### CONSTRUCTION

25

Conductors:	Circular, circular compacted or shaped, stranded, annealed copper conductor, class 2 acc. to BS EN 60228
Primary insulation:	A suitable wrapping of mica tape with a glass cloth
Insulation:	Cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
Bedding:	Special low smoke zero halogen (LSOH) compound
Armour:	Single layer of galvanized steel wires applied helically over the bedding
Outer sheath:	Thermoplastic halogen free compound (LSOH) of LTS1 type acc. to BS 7655-6.1



### CHARACTERISTICS

Colour of sheath:	Black. Other colours are available on special request.
Core identification:	2 – core: brown, blue 3 – core: brown, black, grey 4 – core: blue, brown, black, grey
Maximum conductor operating temperature:	+90°C
Lowest installation temperature:	0°C
Minimum operating temperature after installation without movement:	-40°C
Maximum short-circuit conductor temperature:	+250°C
Fire resistance:	Category F2 acc. to BS 7846, BS 6387 – Category C, W, Z
Flame propagation:	BS EN 60332-1-2, EN 60332-3-24
Low smoke emission:	BS EN 61034-2
Low corrosive and acid gas emission:	BS EN 60754-1, HCl content < 0.5% BS EN 60754-2, pH ≥ 4.3 & conductivity £ 10 mSmm-1
Minimum bending radius:	6 × D for cables with circular copper conductors and 8 × D for cables with shaped copper conductors; D – overall diameter of the cable

# FLAME-X 950 SERIES 4

## 600/1000V

### 26

## Applications

Fire resistant armoured cables for use in fixed installations in industrial areas, public buildings (as for example power plants, hospitals, shopping centres, theatres) and similar applications where maintenance of power supply during a fire is required for a defined period of time.

---

Standard length cable  
packing:

500 or 1,000 m on drums.  
Other forms of packing and delivery are available on request.

---

## Approvals

---

BASEC 25 mm<sup>2</sup> to 400 mm<sup>2</sup> 2-core, 3-core, 4-core and 1,5 mm<sup>2</sup> to 16 mm<sup>2</sup> 2-core, 3-core, 4-core

---

LPCB 1,5 mm<sup>2</sup> to 400 mm<sup>2</sup> 2-core, 3-core, 4-core and 1,5 mm<sup>2</sup> to 16 mm<sup>2</sup> 2-core, 3-core, 4-core

---

# FLAME-X 950 SERIES 4

## 600/1000V

27

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single- phase A.C. or D.C.*		Voltage Drop D.C.*	Voltage Drop single- phase A.C.*
							Clipped direct	Free Air		
n x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m
2 x 1.5	0.6	1.3	0.9	12.8	346	12.1	27	29	31.0	31.0
2 x 2.5	0.7	1.4	0.9	14.3	420	7.41	36	39	19.0	19.0
2 x 4	0.7	1.4	0.9	15.3	491	4.61	49	52	12.0	12.0
2 x 6	0.7	1.4	0.9	16.1	554	3.08	62	66	7.9	7.9
2 x 10	0.7	1.5	0.9	18.1	712	1.83	85	90	4.7	4.7
2 x 16	0.7	1.5	1.25	20.8	1032	1.15	110	115	2.9	2.9
2 x 25	0.9	1.6	1.25	24.8	1421	0.727	146	152	1.85	1.90
2 x 25	0.9	1.6	1.25	20.8	1097	0.727	146	152	1.85	1.90
2 x 35	0.9	1.7	1.6	28.2	1944	0.524	180	188	1.35	1.35
2 x 35	0.9	1.7	1.6	23.5	1494	0.524	180	188	1.35	1.35
2 x 50	1.0	1.8	1.6	25.7	1830	0.387	219	228	0.98	1.00
2 x 70	1.1	1.9	1.6	28.7	2370	0.268	279	291	0.67	0.69
2 x 95	1.1	2.0	2.0	32.6	3239	0.193	338	354	0.49	0.52
2 x 120	1.2	2.1	2.0	35.1	3823	0.153	392	410	0.39	0.42
2 x 150	1.4	2.2	2.0	38.1	4534	0.124	451	472	0.31	0.35
2 x 185	1.6	2.4	2.5	42.9	5856	0.0991	515	539	0.25	0.29
2 x 240	1.7	2.5	2.5	46.7	7155	0.0754	607	636	0.195	0.24
2 x 300	1.8	2.6	2.5	50.7	8555	0.0601	698	732	0.155	0.21

# FLAME-X 950 SERIES 4

## 600/1000V

28

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop three phase A.C.*
								Clipped direct	Free Air	
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
3 × 1.5	0.6	1.3	0.9	13.4	377	12.1	210	23	25	27.0
3 × 2.5	0.7	1.4	0.9	15	465	7.41	350	31	33	16.0
3 × 4	0.7	1.4	0.9	16.1	544	4.61	570	42	44	10.0
3 × 6	0.7	1.4	0.9	16.9	628	3.08	850	53	56	6.8
3 × 10	0.7	1.5	1.25	19.7	944	1.83	1400	73	78	4.0
3 × 16	0.7	1.6	1.25	22.1	1215	1.15	2200	94	99	2.5
3 × 25	0.9	1.7	1.6	27.5	1887	0.727	3575	124	131	1.65
3 × 25	0.9	1.7	1.6	25	1637	0.727	3575	124	131	1.65
3 × 35	0.9	1.8	1.6	30	2314	0.524	5005	154	162	1.15
3 × 35	0.9	1.8	1.6	27.4	2025	0.524	5005	154	162	1.15
3 × 50	1.0	1.8	1.6	29.8	2472	0.387	7150	187	197	0.87
3 × 70	1.1	1.9	1.6	33.5	3237	0.268	10010	238	251	0.60
3 × 95	1.1	2.1	2.0	38	4434	0.193	13585	289	304	0.45
3 × 120	1.2	2.2	2.0	41.1	5287	0.153	17160	335	353	0.37
3 × 150	1.4	2.3	2.5	46.5	6768	0.124	21450	386	406	0.30
3 × 185	1.6	2.4	2.5	50.4	8094	0.0991	26455	441	463	0.26
3 × 240	1.7	2.6	2.5	55.4	10053	0.0754	34320	520	546	0.21
3 × 300	1.8	2.7	2.5	60.2	11949	0.0601	42900	599	628	0.185
3 × 400	2.0	2.9	2.5	66.8	14895	0.0470	57200	673	728	0.165

# FLAME-X 950 SERIES 4

## 600/1000V

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. Overall diameter	Approx. Net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop Three phase A.C.*
								Clipped direct	Free Air	
n x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
4 x 1.5	0.6	1.3	0.9	14.4	422	12.1	210	23	25	27.0
4 x 2.5	0.7	1.4	0.9	16.1	522	7.41	350	31	33	16.0
4 x 4	0.7	1.4	0.9	17.4	628	4.61	570	42	44	10.0
4 x 6	0.7	1.5	1.25	19.1	848	3.08	850	53	56	6.8
4 x 10	0.7	1.5	1.25	21.3	1091	1.83	1400	73	78	4.0
4 x 16	0.7	1.6	1.25	24	1440	1.15	2200	94	99	2.5
4 x 25	0.9	1.7	1.6	29.9	2240	0.727	3575	124	131	1.65
4 x 25	0.9	1.7	1.6	27.7	2028	0.727	3575	124	131	1.65
4 x 35	0.9	1.8	1.6	32.6	2769	0.524	5005	154	162	1.15
4 x 35	0.9	1.8	1.6	30.3	2491	0.524	5005	154	162	1.15
4 x 50	1.0	1.9	1.6	33.3	3111	0.387	7150	187	197	0.87
4 x 70	1.1	2.1	2.0	38.9	4418	0.268	10010	238	251	0.60
4 x 95	1.1	2.2	2.0	42.6	5607	0.193	13585	289	304	0.45
4 x 120	1.2	2.3	2.5	47.9	7216	0.153	17160	335	353	0.37
4 x 150	1.4	2.4	2.5	51.9	8559	0.124	21450	386	406	0.30
4 x 185	1.6	2.6	2.5	56.6	10275	0.0991	26455	441	463	0.26
4 x 240	1.7	2.7	2.5	62.4	12855	0.0754	34320	520	546	0.21
4 x 300	1.8	2.9	2.5	67.4	15307	0.0601	42900	599	628	0.185
4 x 400	2.0	3.2	3.15	77.0	19826	0.0470	57200	673	728	0.165

\* acc to BS 7671 table 4E4A & 4E4B

29

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.

MAX  
+90°C

UV

✓  
RoHSBS 7846  
Cert No. 1354a

# FLAME-X 950 SERIES 6

## 600/1000V

BS 7846 - F120

Armoured fire resistant electric power and control cable having low emission of smoke and corrosive gases when affected by fire

30

## CONSTRUCTION

Conductors:	Circular, circular compacted or shaped stranded, annealed copper conductor, class 2 acc. to BS EN 60228
Primary insulation:	Fire resistant mica tape with a glass cloth
Insulation:	Cross-linked polyethylene (XLPE) of GP8 type acc. to BS 7655-1.3
Cable core:	Insulated conductors twisted together wrapped by fire resistance tape (optional also by polyester film)
Bedding:	Thermoplastic zero halogen low smoke compound (LSOH) wrapped by fire resistance tape
Armour:	Galvanized steel wires applied helically (optional polyester film over the armour)
Outer sheath:	Thermoplastic zero halogen low smoke compound of LTS1 type acc. to BS 7655-6.1



## CHARACTERISTICS

Colour of sheath:	Black. Other colours are available on special request.	
Core identification:	2 – core:	brown, blue
	3 – core:	brown, black, grey
	4 – core:	blue, brown, black, grey
Maximum conductor operating temperature	+90°C	
Lowest installation temperature:	0°C	
Minimum operating temperature after installation without movement:	-40°C	
Maximum short-circuit conductor temperature:	+250°C	
Minimum bending radius:	6 × D for cables with circular copper conductors 8 × D for cables with shaped copper conductors D – overall diameter	

# FLAME-X 950 SERIES 6

## 600/1000V

### Fire performance

31

Fire resistance:	BS 8491	Category F120
	BS 8519	Category 1, 2 and 3
Flame propagation:	BS EN 60332-1-2	
	BS EN 60332-3-24	
Smoke density:	BS EN 61034-2	
Corrosive and acid gases emission:	BS EN 60754-1 <sup>1)</sup> BS EN 60754-2 <sup>1)</sup>	HCl content < 0.5% pH ≥ 4.3 & conductivity ≤ 10 µSmm <sup>-1</sup>

1) BS EN 60754-1 & BS EN 60754-2 standards replace BS EN 50267-2-1

### Applications

Enhanced fire resistant armoured cables for use in life safety and fire fighting systems of public buildings (hospitals, shopping centres, theatres, stadiums) and similar applications where maintenance of power supply during a fire is critical.

Standard length cable packing:	500 or 1,000 m on drums. Other forms of packing and delivery are available on request.
--------------------------------	---

### Approvals

BASEC	4 mm <sup>2</sup> to 16 mm <sup>2</sup> 3-core, 4-core and 25 mm <sup>2</sup> to 400 mm <sup>2</sup> 2-core, 3-core, 4-core;
LPCB	4 mm <sup>2</sup> to 16 mm <sup>2</sup> 3-core, 4-core and 25 mm <sup>2</sup> to 400 mm <sup>2</sup> 3-core, 4-core

# FLAME-X 950 SERIES 6

## 600/1000V

32

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Current rating single-phase A.C. or D.C.*		Voltage Drop D.C.*	Voltage Drop single-phase A.C.*
							Clipped direct	Free Air		
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	mV/A/m	mV/A/m
2 × 4 RM	0.7	1.4	1.25	20.1	712	4.61	49	52	12.0	12.0
2 × 6 RM	0.7	1.4	1.25	20.1	744	3.08	62	66	7.9	7.9
2 × 10 RM	0.7	1.5	1.25	20.9	839	1.83	85	90	4.7	4.7
2 × 16 RM	0.7	1.5	1.25	22.9	1027	1.15	110	115	2.9	2.9
2 × 25 RM	0.9	1.6	1.25	26.4	1425	0.727	146	152	1.85	1.90
2 × 35 RM	0.9	1.7	1.6	29.8	1929	0.524	180	188	1.35	1.35
2 × 50 SM	1.0	1.8	1.6	27.1	1963	0.387	219	228	0.98	1.00
2 × 70 SM	1.1	1.9	1.6	31.0	2552	0.268	279	291	0.67	0.69
2 × 95 SM	1.1	2.0	2.0	34.0	3392	0.193	338	354	0.49	0.52
2 × 120 SM	1.2	2.1	2.0	36.5	4014	0.153	392	410	0.39	0.42
2 × 150 SM	1.4	2.2	2.0	39.5	4717	0.124	451	472	0.31	0.35
2 × 185 SM	1.6	2.4	2.5	44.3	6069	0.0991	515	539	0.25	0.29
2 × 240 SM	1.7	2.5	2.5	48.1	7390	0.0754	607	636	0.195	0.24
2 × 300 SM	1.8	2.6	2.5	52.1	8772	0.0601	698	732	0.155	0.21
2 × 400 SM	2.0	2.8	2.5	59.6	11120	0.047	787	847	0.120	0.19

# FLAME-X 950 SERIES 6

## 600/1000V

33

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop three phase A.C.*
								Clipped direct	Free Air	
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
3 × 4 RM	0.7	1.4	1.25	20.2	832	4.61	570	42	44	10.0
3 × 6 RM	0.7	1.4	1.25	20.1	803	3.08	850	53	56	6.8
3 × 10 RM	0.7	1.5	1.25	21.8	985	1.83	1400	73	78	4.0
3 × 16 RM	0.7	1.6	1.25	24.2	1241	1.15	2200	94	99	2.5
3 × 25 RM	0.9	1.7	1.6	29.1	1930	0.727	3575	124	131	1.65
3 × 35 RM	0.9	1.8	1.6	31.6	2328	0.524	5005	154	162	1.15
3 × 50 SM	1.0	1.8	1.6	31.2	2629	0.387	7150	187	197	0.87
3 × 70 SM	1.1	1.9	1.6	34.9	3394	0.268	10010	238	251	0.60
3 × 95 SM	1.1	2.1	2.0	39.4	4617	0.193	13585	289	304	0.45
3 × 120 SM	1.2	2.2	2.0	42.5	5486	0.153	17160	335	353	0.37
3 × 150 SM	1.4	2.3	2.5	47.9	7003	0.124	21450	386	406	0.30
3 × 185 SM	1.6	2.4	2.5	51.8	8352	0.0991	26455	441	463	0.26
3 × 240 SM	1.7	2.6	2.5	56.8	10299	0.0754	34320	520	546	0.21
3 × 300 SM	1.8	2.7	2.5	61.6	12262	0.0601	42900	599	628	0.185
3 × 400 SM	2.0	2.9	2.5	68.9	15520	0.0470	57200	673	728	0.165

# FLAME-X 950 SERIES 6

## 600/1000V

**34**

### Technical and Electrical Characteristics

Number and CSA of conductor	Nominal thickness of insulation	Nominal thickness of outer sheath	Nominal diameter of armour wires	Approx. overall diameter	Approx. net weight of cables	Maximum conductor resistance at 20°C	Short circuit current rating	Current rating three phase A.C.*		Voltage Drop Three phase A.C.*
								Clipped direct	Free Air	
n × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km	Amp	Amp	Amp	mV/A/m
4 × 4 RM	0.7	1.4	1.25	20.1	869	4.61	570	42	44	10.0
4 × 6 RM	0.7	1.5	1.25	21.2	906	3.08	850	53	56	6.8
4 × 10 RM	0.7	1.5	1.25	23.4	1140	1.83	1400	73	78	4.0
4 × 16 RM	0.7	1.6	1.25	26.1	1466	1.15	2200	94	99	2.5
4 × 25 RM	0.9	1.7	1.6	31.5	2261	0.727	3575	124	131	1.65
4 × 35 RM	0.9	1.8	1.6	34.2	2752	0.524	5005	154	162	1.15
4 × 50 SM	1.0	1.9	1.6	34.7	3271	0.387	7150	187	197	0.87
4 × 70 SM	1.1	2.1	2.0	40.3	4605	0.268	10010	238	251	0.60
4 × 95 SM	1.1	2.2	2.0	44.0	5789	0.193	13585	289	304	0.45
4 × 120 SM	1.2	2.3	2.5	49.3	7460	0.153	17160	335	353	0.37
4 × 150 SM	1.4	2.4	2.5	53.3	8785	0.124	21450	386	406	0.30
4 × 185 SM	1.6	2.6	2.5	58.0	10528	0.0991	26455	441	463	0.26
4 × 240 SM	1.7	2.7	2.5	63.8	13141	0.0754	34320	520	546	0.21
4 × 300 SM	1.8	2.9	2.5	68.8	15622	0.0601	42900	599	628	0.185
4 × 400 SM	2.0	3.2	3.15	79.1	20575	0.0470	57200	673	728	0.165

\* acc to BS 7671 table 4E4A & 4E4B

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.



W0 SS 424 02-19-5 Notification Unit: 1488  
CE  
FLAMEBLOCKER EXQ Light 3G1,5 500V  
Standard: EN 50575:2014 + A1: 2016  
Batch: 0219247  
Net weight: 33 [KG]  
Index: G128081  
Date: 2017-05-03  
Length: 300 [M]

Supply of electricity and communications in buildings and other civil engineering  
works with the objective of limiting the generation and spread of fire and smoke

Certification year: 17  
DoP: DoP-17-0198-01  
Standard: EN 50575:2014 + A1: 2016  
Reaction to fire: D2ca-s2,d2,a2

CE  
Barcode: 4036474163635

EXQ



Copper Cable Company Ltd.

Unit 3 Dromintee Road  
Hilltop industrial Estate  
Bardon Hill  
Coalville  
Leicestershire  
LE67 1TX  
General Cable Sales  
T: (+44) 01530278800  
F: (+44) 01530812221

[info@copper-cable.co.uk](mailto:info@copper-cable.co.uk)



TELE-FONIKA Kable S.A.  
ul. Hipolita Cegielskiego 1  
32-400 Myślenice, Poland  
T. +48 12 652 5000  
F. +48 12 652 5156

[info@tfkable.com](mailto:info@tfkable.com)

[www.tfkable.com](http://www.tfkable.com)